



ANTENNA FEATURES

- Tuned antenna.
- Circular polarization.
- Bandwidth 0.2 MHz.
- Stainless steel.
- Omnidirectional radiation pattern.

RADIATION PATTERNS (Mid Band)

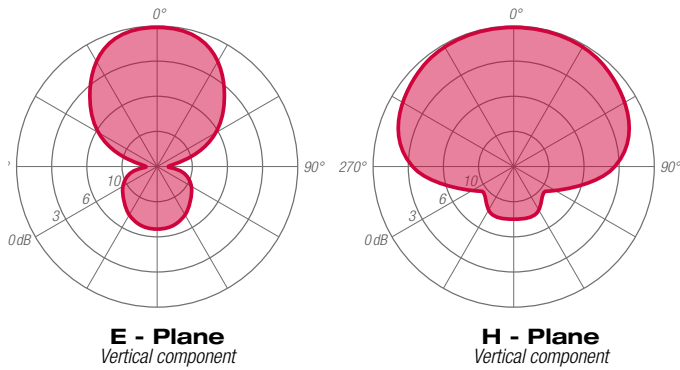

GAIN (dBi)

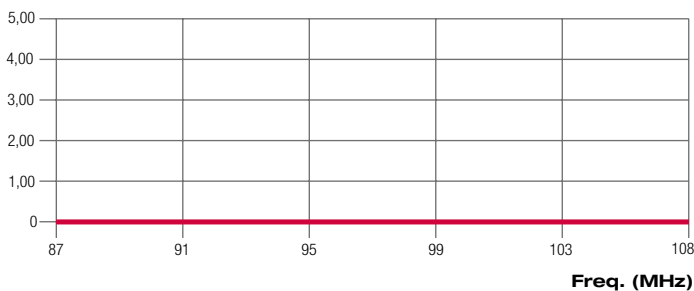

VSWR



ELECTRICAL DATA

WORKING BAND:	87.5 - 108 MHz
BANDWIDTH:	0.2 MHz
GAIN:	-2.15 dBd (0 dBi)
VSWR:	≤ 1.12:1 (-25 dB)
POLARIZATION:	Circular
IMPEDANCE:	50 Ohm balanced
HALF POWER BEAMWIDTH:	Omnidirectional ± 1.5 dB in free space Omnidirectional ± 2.0 dB with pole ø104mm (4")
LIGHTNING PROTECTION:	All metal parts DC grounded including inner conductors
AVAILABLE VERSION AND CODE:	ACG0102230- N f. conn.r - max 500W rms To be tuned on field. ACG0102231- N f. conn. - max 500W rms Factory tuned. ACG0102232- DIN 7/16" f. conn. - max 1500W rms Factory tuned. ACG0102233- DIN 7/16" f. conn. - max 1500W rms To be tuned on field

MECHANICAL DATA

MATERIALS:	Stainless steel
MOUNTING:	Directly on supporting structure
MOUNTING BRACKETS:	Included for Ø30÷65mm pipe (Ø1.18" - 2+1/2")
TREATMENTS:	Silver plated connector
ANTENNA DIMENSIONS:	Min. 885x410x295 mm (34.8x16.1x11.6 in)*
ANTENNA WEIGHT:	4.5 kg (9.9 lb)*
WIND SURFACE:	Min. 0.01m ² (0.10ft ²) front - 0.04m ² (0.43 ft ²) side*
WIND LOAD (160 km/h and 30°C)	Min. 0.01 kN front - 0.03 kN side*
SURVIVAL WIND:	180 km/h (111.8 mph)
PACKING DIMENSIONS:	Box 1100x1100x360mm - 7kg (43.3x43.3x14.1 in - 15.4lb)

Note: (*) Dimensions depend on working frequency.
Current values are referred to 98.00 MHz frequency.

Specification are subject to change without notice



ARRAY FEATURES

- Omnidirectional patterns
- Equal or unequal power distribution system
- Configurable for specific azimuth and elevation pattern
- Suitable for multiplexing many channels


ARRAY ELECTRICAL DATA

FREQUENCY RANGE	87.5-108 MHz
IMPEDANCE	50 ohm
CONNECTOR	EIA flange according to system power rating
POWER RATING	The antenna system can accept any power according to requirements
VSWR	≤ 1.10 in the operating channel Antenna system VSWR value also depending from the supporting structure
POLARIZATION	Circular
GAIN	Refer to table
HORIZONTAL PATTERN	Omnidirectional
VERTICAL PATTERN	Null fill, beam tilt and special requirements to order
OTHER FEATURES	Antenna components and feed harnesses can be optimized for channels of interest.

ARRAY MECHANICAL DATA

HEIGHT OF ARRAY	Subject to number of bays
TOTAL NET WEIGHT	Refer to table
WIND LOAD	Refer to table
PRESSURIZABLE	No
MOUNTING HARDWARE	Optional mounting for side mount configuration

ANTENNA DIMENSIONAL DETAILS

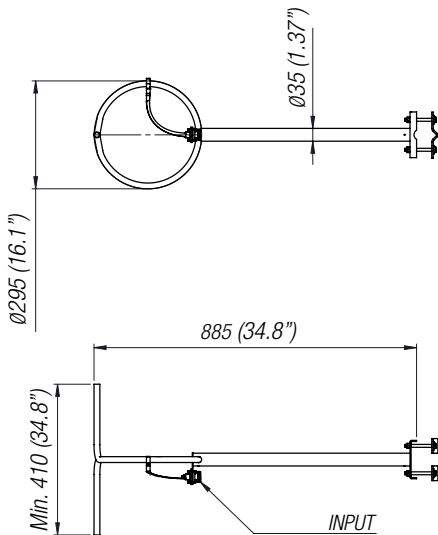

Note: Dimensions depend on working frequency.
Current values are referred to 98.00 MHz frequency.

OPTIONS & SERVICES

PATTERN DESIGN	Custom azimuth and elevation (beam tilt and null fill) patterns can be designed to meet specific protection/coverage requirements
PATTERN CERTIFICATION	Proof-of-performance factory test and pattern measurements on ALDENA test plan area
MOUNTING HARDWARE	Turn-key antenna delivering Tower top/side spine Special hardware/brackets
TRANSMISSION LINE	Transmission line system design and layout
COMBINERS/FILTERS	Combiners/Filters to suit requirements can be supplied
CALCULATION SERVICES	Coverage/interference simulations EM Near Field control and reduction (Environmental impact studies)
ON-SITE SERVICES	Site Survey and Inspection Installation/commissioning and supervising Drive test & EM Field strength measurements After sales maintenance
TRAINING	Technical training certification and consultancy

ARRAY TECHNICAL DATA

BAYS	PANELS PER BAY	GAIN ⁽¹⁾ dB	GAIN TIMES ⁽¹⁾	WEIGHT ⁽²⁾ kg (lb)	ANTENNA HEIGHT ^(L) m (ft)	WIND LOAD ⁽³⁾ kN
2	1	0.8	1.2	18 (39.6)	3.5 (11.4)	0,06
4	1	3.8	2.4	30 (66.1)	8.9 (29.2)	0,12
6	1	5.5	3.6	46 (101.4)	14.3 (46.9)	0,18
8	1	6.8	4.8	60 (132.2)	19.7 (64.6)	0,25
12	1	8.5	7.2	94 (207.2)	30.5 (100.0)	0,37


(1) Gain data is relative to half-wave dipole. Values given are nominal and assume standard harness configurations
Gain will vary depending in specific feed system, null fill and beam tilt.

(2) Without mounting hardware.

(3) 160 km/h (100 mph) wind and 30°C (86°F) air temperature.

(L) Total Antenna Height.

Note: Current values are referred to 98.00 MHz frequency.

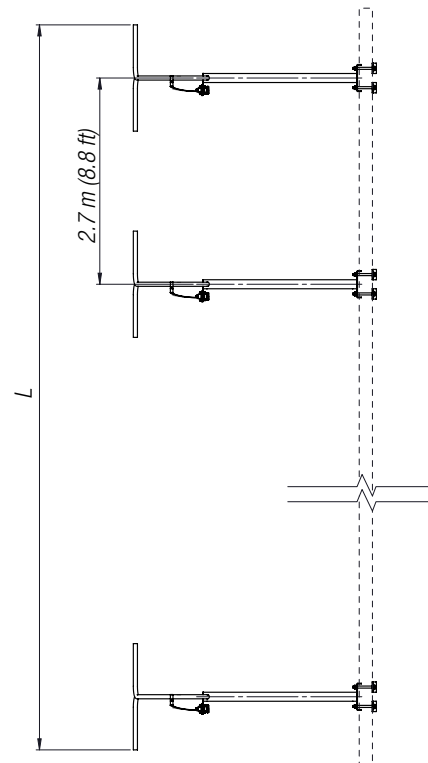

Note:
Total Antenna Height (L) is subject to change according to requirement.
Custom designed antennas meeting special requirements such as specific azimuthal pattern, different gains and custom power input are available upon request.

Specification are subject to change without notice