




### **ANTENNA FEATURES**

- Tuned coaxial dipole antenna 6.0 dBd gain.
- Vertical polarization.
- Bandwidth 14 MHz.
- Omnidirectional radiation pattern.
- Plug & play installation.


## **RADIATION PATTERNS** (Mid Band)

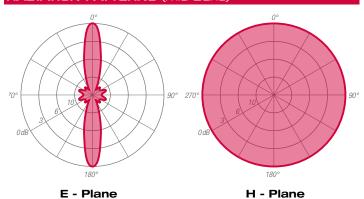


-	Plane	н	-

### ELECTRICAL DATA WORKING BAND: 174-240 MHz BANDWIDTH: 14 MHz - factory tuned GAIN: 6.0 dBd (8.2 dBi) VSWR: $\leq$ 1.2:1 (-20.8 dB) POLARIZATION: Vertical IMPEDANCE: 50 Ohm balanced E-Plane - 17° HALF POWER BEAMWIDTH: H-Plane - 360° LIGHTNING PROTECTION: All metal parts DC grounded including inner conductors AVAILABLE VERSION AND CODE: ADC0404410 - DIN 7/16" female - 1500W rms

### GAIN (dB)

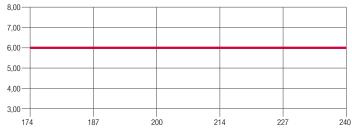

Freq. (N	ЛHz)
----------	------

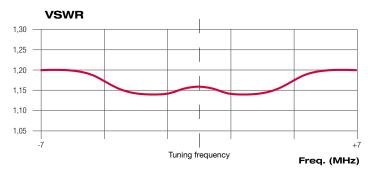



<b>MECHANICAL</b>	DATA
MATERIALS:	Aluminium and stainless steel
MOUNTING:	Directly on top of existing structure/mast by means of a
	flange ø280 mm (11 in) 8xM16 (holes)
MOUNTING BRACKETS:	Included
ICING PROTECTION:	Whole antenna fully covered by fiberglass radome
	Standard grey color
TREATMENTS:	Cover in stainless steel
	Lines and bottom base Military norms treatment
	(MIL-C-5541).
	Silver-plated connector
PRESSURIZATION:	No
ANTENNA DIMENSIONS:	131x6590 mm (5.15x259.44 in)
	Base flange ø280 mm (11 in)
WEIGHT:	43 kg (94.8 lb)
WIND SURFACE:	0.86 m <sup>2</sup> (2.82 ft <sup>2</sup> ) front - 0.86m <sup>2</sup> (2.82 ft <sup>2</sup> ) side
WIND LOAD	0.70 kN front - 0.70 kN side
(160 km/h and 30°C)	
SURVIVAL WIND:	160 km/h (99.41 mph)
PACKING DIMENSIONS:	Wooden cage (ISPM-15)
	400x500x6800mm - 160 kg
	(15.74x19.68x267.71 in - 352.74 lb)
SPECIAL FEATURES	N°3 non metallic anti-vibration tails are strongly recomended
	for the setup

Specification are subject to change without notice



# ANTENNA DIMENSIONAL DETAILS - PLAN ANTENNA DIMENSIONAL DETAILS - SIDE

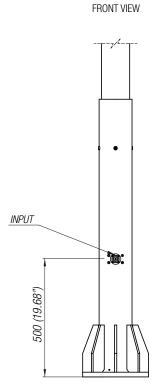



_	EYEBOLT (1)	
6590 (259.44")	ø120 (4.72")	
	1178 (46.37")	

1.  $\ensuremath{\text{N}}\xspace^\circ 3$  non metallic anti-vibration tails are strongly recomended for the setup.

OPTIONS & SERVICES				
PATTERN DESIGN	Custom azimuth and elevation (beam tilt and null fill)			
	patterns can be designed to meet specific			
	protection/coverage requirements			
PATTERN CERTIFICATION	Proof-of-performance factory test and			
	pattern measurements on ALDENA test plan area			
MOUNTING HARDWARE	Turn-key antenna delivering			
	Tower top/side spine			
	Special hardware/brackets			
TRANSMISSION LINE	Transmission line system design and layout			
COMBINERS/FILTERS	Combiners/Filters to suit requirements can be supplied			
CALCULATION SERVICES	Coverage/interferfence simulations			
	EM Near Field control and reduction (Environmental			
	impact studies)			
ON-SITE SERVICES	Site Survey and Inspection			
	Installation/commissioning and supervisioning			
	Drive test & EM Field strength measurements			
	After sales maintenance			
TRAINING	Techical training certification and consultancy			

Specification are subject to change without notice