


ANTENNA FEATURES

- Yagi 5 elements tuned antenna.
- Vertical or horizontal polarization.
- Bandwith 0.2 MHz.
- Directional radiation pattern.
- Stainless steel.
- Safety parafil kit included.
- Demountable.


RADIATION PATTERNS (Mid Band)

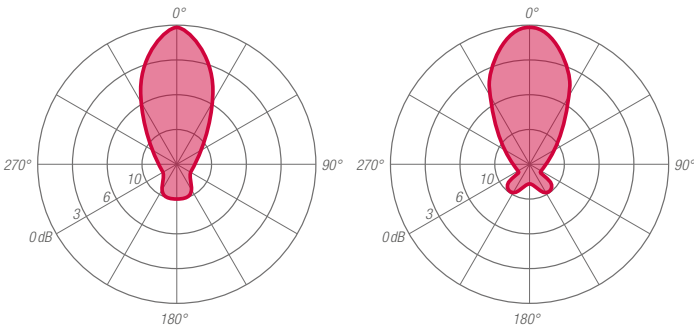

E - Plane


H - Plane

GAIN (dB)

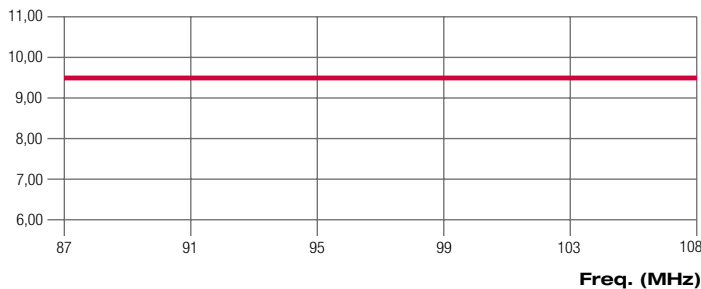

Freq. (MHz)

VSWR

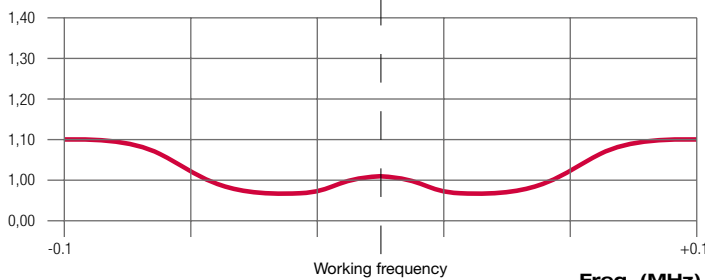

Freq. (MHz)

ELECTRICAL DATA

WORKING BAND:	87.5 - 108 MHz
BANDWIDTH:	0.2 MHz
GAIN:	9.5 dBd (11.7 dBi)
VSWR:	≤ 1.1:1 (-26.4 dB)
POLARIZATION:	Vertical or horizontal
IMPEDANCE:	50 Ohm unbalanced
HALF POWER BEAMWIDTH:	E-Plane - 39° H-Plane - 45°
LIGHTNING PROTECTION:	All metal parts DC grounded including inner conductors
AVAILABLE VERSION AND CODE:	AST0502335 - N - max 400W rms AST0502336 - DIN 7/16 female - max 1200W rms AST0502337 - EIA 7/8" - max 1800W rms

MECHANICAL DATA

MATERIALS:	Stainless steel body, bracket and bolts Aluminum junctions
MOUNTING:	Directly on supporting structure Safety parafil kit included
MOUNTING BRACKETS:	Included for Ø60÷114mm pipe (Ø 2.36" - 4")
ICING PROTECTION:	Optional ABS radome (Code XRAST35)
TREATMENTS:	Aluminum componets military norms treatment (MIL-C-5541) Silver plated connector
PRESSURIZATION:	No
ANTENNA DIMENSIONS:	2800x1600x110 mm (110.2x62.9x4.3 in)*
ANTENNA WEIGHT:	18 kg (39.6 lb)*
WIND SURFACE:	0.04m ² (0.43 ft ²) front - 0.27m ² (2.90 ft ²) side*
WIND LOAD (160 km/h and 30°C)	0.03 kN front - 0.22 kN side*
SURVIVAL WIND:	160 km/h (99.4 mph)
PACKING DIMENSIONS:	Box 2900x250x250mm - 25 kg* (114.2x9.8x9.8 in - 55.1 lb)

Note: (*) Dimensions depend on working frequency.
Current values are referred to 98.00 MHz frequency.

Specification are subject to change without notice



ARRAY FEATURES

- Directional
- Equal or unequal power distribution system
- Configurable for specific azimuth and elevation pattern
- Suitable for multiplexing many channels


ARRAY ELECTRICAL DATA

FREQUENCY RANGE	87.5 ÷ 108 MHz
IMPEDANCE	50 ohm
CONNECTOR	EIA flange according to system power rating
POWER RATING	The antenna system can accept any power according to requirements
VSWR	≤ 1.1 in the working frequency Antenna system VSWR value also depending from the supporting structure
POLARIZATION	Vertical or horizontal
GAIN	Refer to table
HORIZONTAL PATTERN	Directional
VERTICAL PATTERN	Null fill, beam tilt and special requirements to order

ARRAY MECHANICAL DATA

HEIGHT OF ARRAY	Subject to number of bays
TOTAL NET WEIGHT	Refer to table
WIND LOAD	Refer to table
PRESSURIZABLE	No
MOUNTING HARDWARE	Optional mounting for side mount configuration

ANTENNA DIMENSIONAL DETAILS

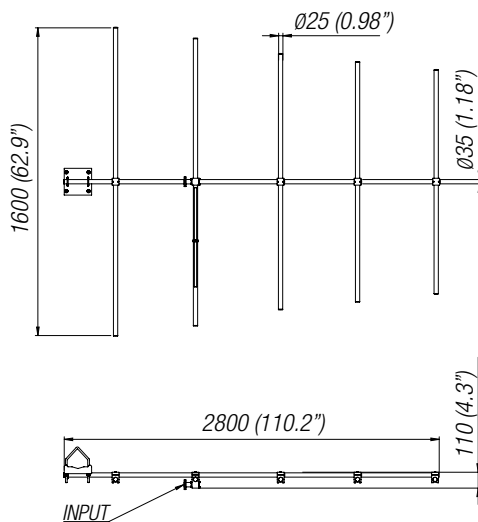

Note: Dimensions depend on working frequency.
Current values are referred to 98.00 MHz frequency.


OPTIONS & SERVICES

PATTERN DESIGN	Custom azimuth and elevation (beam tilt and null fill) patterns can be designed to meet specific protection/coverage requirements
PATTERN CERTIFICATION	Proof-of-performance factory test and pattern measurements on ALDENA test plan area
MOUNTING HARDWARE	Turn-key antenna delivering Tower top/side spine Special hardware/brackets
TRANSMISSION LINE	Transmission line system design and layout
COMBINERS/FILTERS	Combiners/Filters to suit requirements can be supplied
CALCULATION SERVICES	Coverage/interference simulations EM Near Field control and reduction (Environmental impact studies)
ON-SITE SERVICES	Site Survey and Inspection Installation/commissioning and supervising Drive test & EM Field strength measurements After sales maintenance
TRAINING	Technical training certification and consultancy

ARRAY TECHNICAL DATA

BAYS	PANELS PER BAY	GAIN ⁽¹⁾ dB	GAIN TIMES ⁽¹⁾	WEIGHT ⁽²⁾ kg (lb)	ANTENNA HEIGHT ^(L) m (ft)	WIND LOAD ⁽³⁾ kN
2	1	12.62	18.28	52 (114.6)	4.3 (14.01)	0.43
4	1	15.24	33.42	97 (213.8)	9.7 (31.8)	0.87
6	1	16.86	48.53	145 (319.6)	14.6 (47.9)	1.30
8	1	18.03	63.53	188 (414.4)	19.8 (64.9)	1.74
12	1	19.71	93.54	282 (621.7)	30.2 (99.1)	2.61

(1) Gain data is relative to half-wave dipole. Values given are nominal and assume standard harness configurations
Gain will vary depending in specific feed system, null fill and beam tilt.
(2) Without mounting hardware.
(3) 160 km/h (100 mph) wind and 30°C (86°F) air temperature.
(L) Total Antenna Height.
Note: Current values are referred to 98.00 MHz frequency.

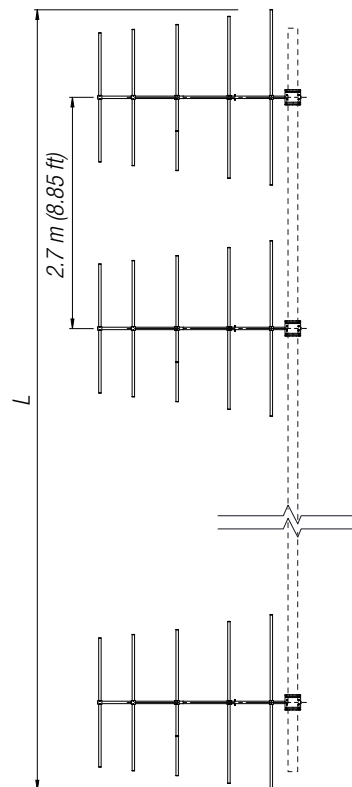

Note:
Total Antenna Height (L) is subject to change according to requirement.
Custom designed antennas meeting special requirements such as specific azimuthal pattern, different gains and custom power input are available upon request.

Specification are subject to change without notice